

90-140 GHz Subharmonic Mixer 次谐波混频器

描述Description

The LFC-6003 is a subharmonic mixer which operates between 90 and 140 GHz.


特点Feature

- Compact Package
- Low LO Power Requirement

产品规格Specifications	
RF频率RF Frequency [GHz]	90 - 140
LO频率LO Frequency [GHz]	45 - 70
IF频率IF Frequency [GHz]	DC-18
LO驱动功率LO Input Power [dBm]	+10 Typ./+15 Max.
RF输入功率RF Input Power[dBm]	+10 Max.
RF接口RF Port	WR8(UG387/UM)
LO接口LO Port	WR15(UG387/UM)
IF接口IF Port	2.92mm-F
壳温Max. Case Temperature [°C]	+45

典型性能Typical Performance	
-------------------------	--

Conversion Loss(SSB) vs Frequency

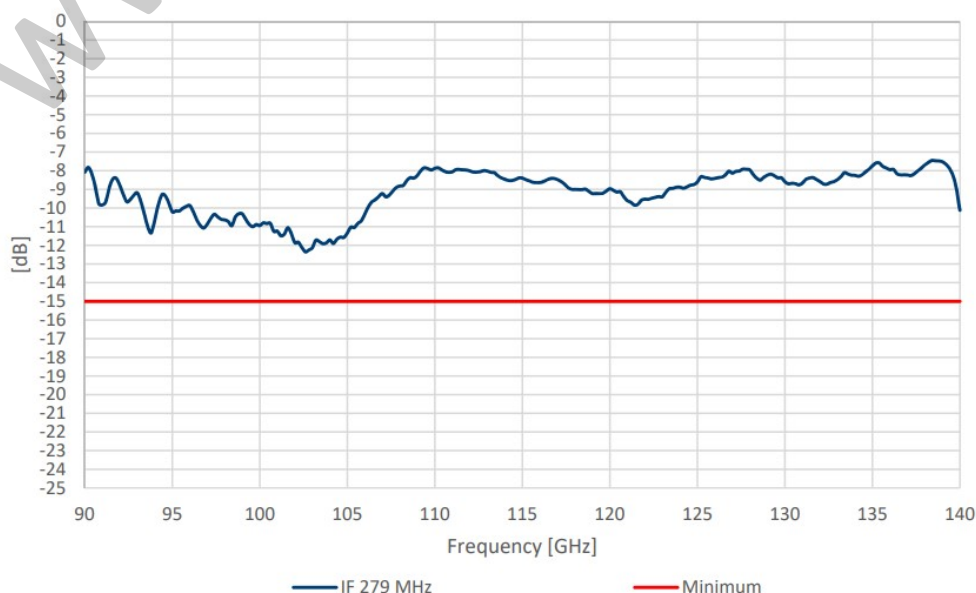

75-140 GHz Subharmonic Mixer

次谐波混频器

外形尺寸Overall Dimension

