

90-140 GHz Frequency Multiplier 倍频器

描述Description


The LMA-6004 is an active frequency multiplier which can output frequency of 90-140 GHz.

特点Feature

- Input Frequency: 15-23.33GHz
- Multiplication Factor: 6

产品规格Specifications	
输入频率Input Frequency [GHz]	15 - 23.33
输出频率Output Frequency [GHz]	90 - 140
倍频次数Multiplication Factor	6
输入功率Input Power [dBm]	+7 Typ./+10 Max.
输出功率Output Power [dBm]	+10 Typ.
输入连接器口RF Input Port	2.92mm-F
输出连接器口RF Output Port	WR8(UG387/UM)
偏置电压Input Voltage[V]	+7V
偏置电流Supply Current[mA]	+700 Typ.
典型性能Typical Performance	

Output Power vs Frequency

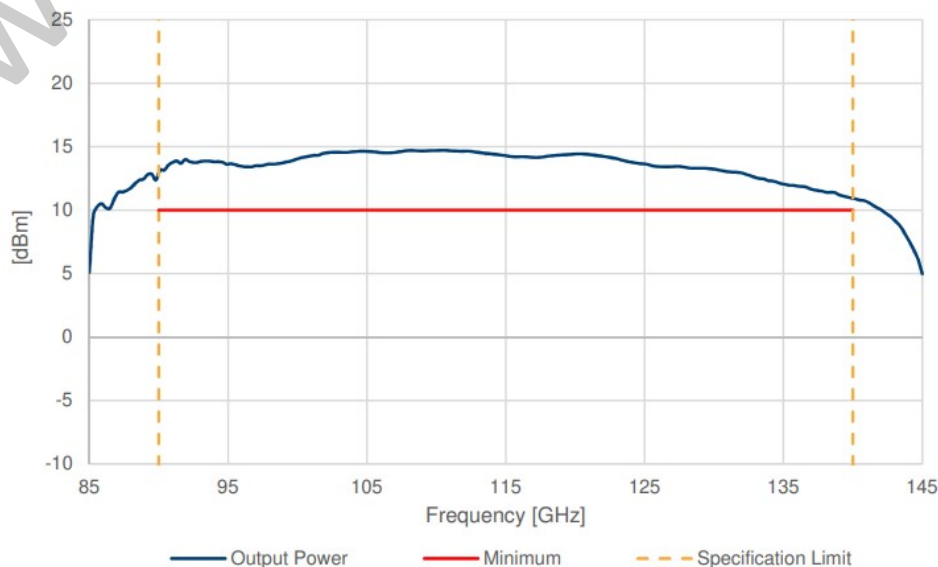

90-140 GHz Frequency Multiplier

倍频器

外形尺寸Overall Dimension

