
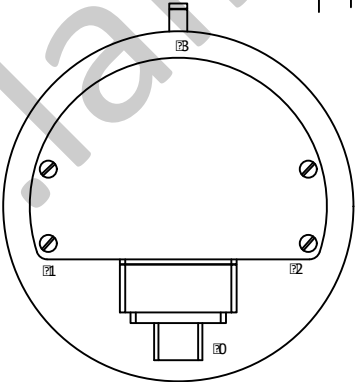
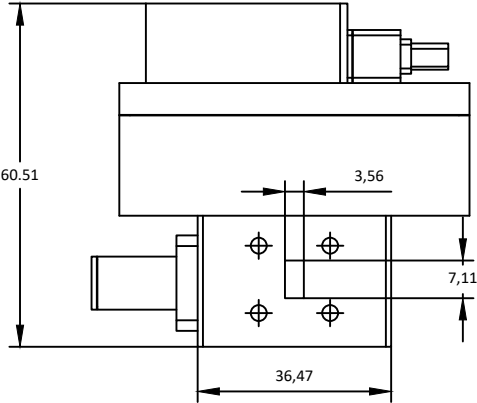
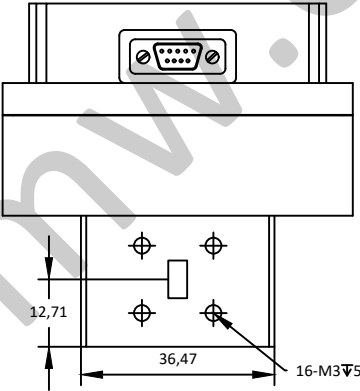


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

J30J-9ZK Pin Definition

Pin#	Definition	Description
1	18V~27V	当 1 接 18V~27V, 持续时间 120±20ms 时,开关处于状态 I (J0-J1、J2-J3 导通)
2	GND	
3	18V~27V	当 3 接 18V~27V, 持续时间 120±20ms 时,开关处于状态 II (J0-J2、J1-J3 导通)
4	空	
5	空	
6	微动开关	开关状态信号,开关处于状态 I 时,6 和 7 导通
7	微动开关	
8	微动开关	开关状态信号,开关处于状态 II 时,8 和 9 导通
9	微动开关	

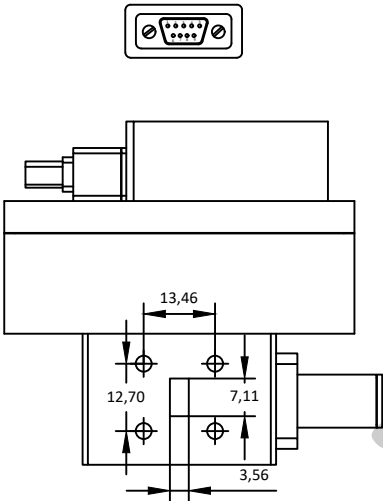

LBS-0012


26.3 - 40GHz 双刀双掷波导开关 DPDT Waveguide Switch

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	26.3-40GHz
隔离度Isolation:	≥70dB
插入损耗Insertion Loss:	≤0.3dB
驻波VSWR:	≤1.15
切换时间Switching Time:	≤120ms
承受功率Power Capacity:	1kW(CW)
直流偏置电压DC Supply Voltage:	18V~27V
直流偏置电流DC Supply Current:	≤2A
工作温度Operation Temperature:	-40 ~ +85℃
存储温度Storage Temperature:	-55 ~ +80℃

—机械技术参数Mechanical Specification—

法兰接口Flange Interface:	FBP320
控制接口Control Interface:	J30J-9ZK

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LBS-0012	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		DRWN		DATE	
		ENG		CHK		Q.A.	
				SIZE		CAGE NO	
				SCALE		UNIT	
				DWG NO.		REV	
				SHEET		1 OF 1	