


REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

Control TTL Input for 6 bits resolution						Attenuation
Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	
0	0	0	0	0	0	Reference
0	0	0	0	0	1	1.0 dB
0	0	0	0	1	0	2.0 dB
0	0	0	1	0	0	4.0 dB
0	0	1	0	0	0	8.0 dB
0	1	0	0	0	0	16.0 dB
1	0	0	0	0	0	31.0 dB
1	1	1	1	1	1	62.0 dB

输入连接器Input Interface:	SMA-F
输出连接器Out Interface:	SMA-F
尺寸Size(excluding connectors):	1.45x1.20x0.65 inches
直流连接器DC Connector:	MICRO-D9-F

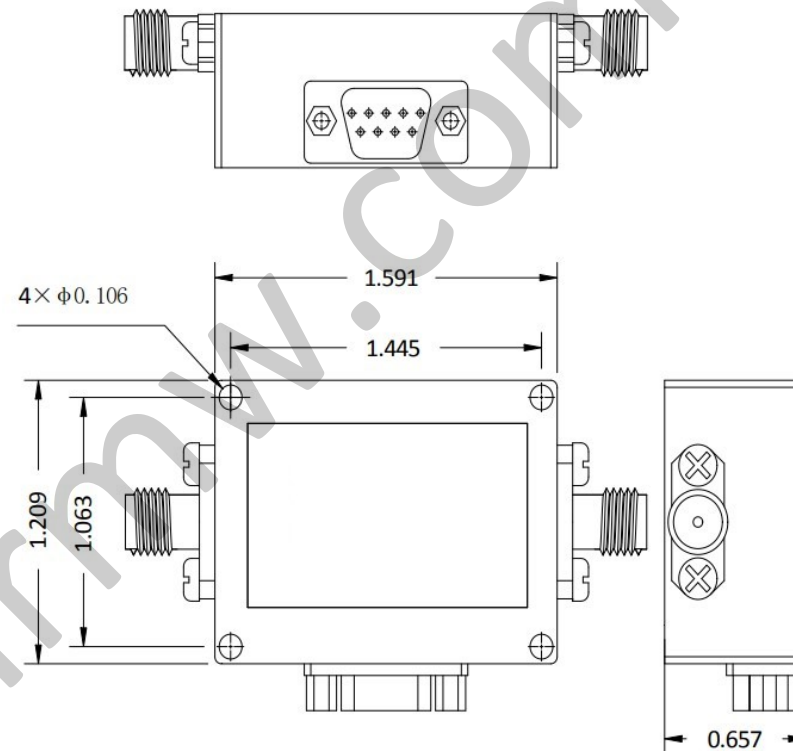

Pin	Function	Pin Definition
1	+5V	
2	GND	
3-8	Bit1-Bit6	
9	NC	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 莱尔微波 Laird Microwave		P/N: LDA-4023	
		Approvals	DATE	www.lairmw.com sales@lairmw.com			
		DRWN		1.0-18.0 GHz 数控衰减器 Digital Controlled Attenuator 最小步进 LSB 1dB			
		ENG		SIZE A3	CAGE NO	DWG NO.	REV 1
		CHK					
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	Q.A.	SCALE 3:2	UNIT mm	SHEET 1 OF 1	