



REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

0.5 – 40 GHz 20dB 定向耦合器 Directional Coupler

频率范围 Frequency Range:	0.5 – 40 GHz
耦合度 Nominal Coupling:	20dB(Typ)
插入损耗 Insertion Loss:	2.7dB(Max) (Include Theoretical loss 0.04dB)
耦合精度 Coupling Accuracy:	±1.5dB
耦合灵敏度 Coupling Sensitivity to Frequency:	±0.7dB(Typ),±1.0dB(Max)
方向性 Directivity:	10dB(Min),15dB(Typ)
驻波比 VSWR:	1.6:1(Max)
功率 Power:	20W cw(Max)
阻抗 Impedance:	50Ω
工作温度 Operating Temperature:	-40~+85 ℃
贮存温度 Storage Temperature:	-50~+95 ℃

输入连接器 Input Interface:	2.92mm-F
输出连接器 Output Interface:	2.92mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	0.3kg

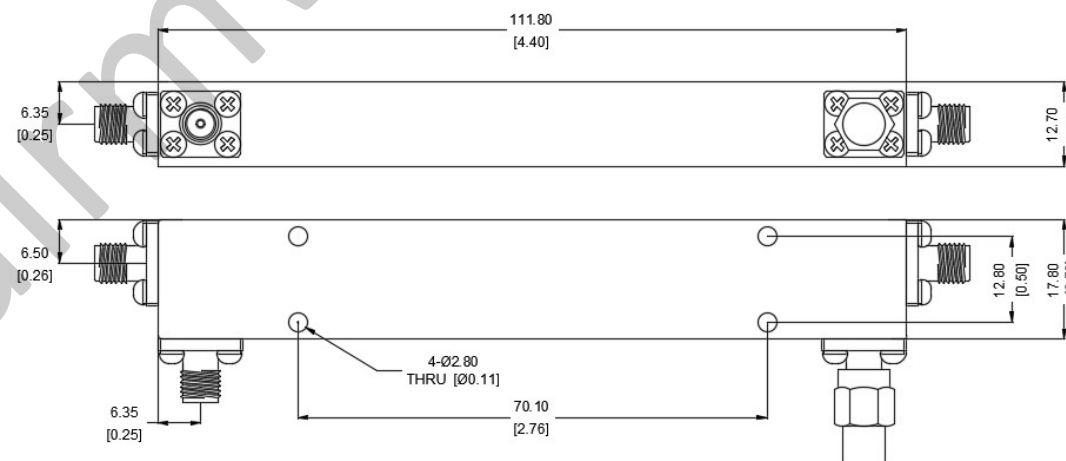

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 1° ±2/5 .XX±0.03 .XXX±0.012						P/N: LDC-0006	
		Approvals DATE		www.lairmw.com sales@lairmw.com			
		DRWN		0.5 - 40GHz 定向耦合器 Directional Coupler			
		ENG		SIZE A3		CAGE NO	
		CHK		DWG NO.		REV 1	
		Q.A.		SCALE 3:2 mm		SHEET 1 OF 1	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03					