
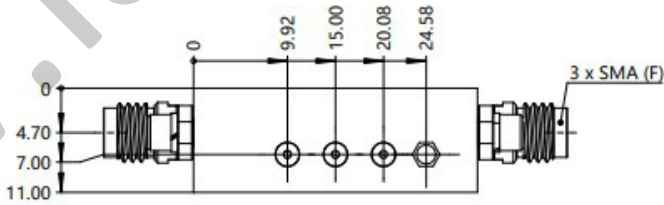
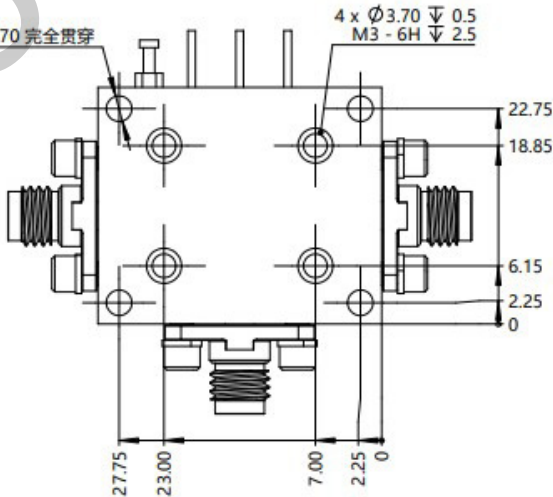
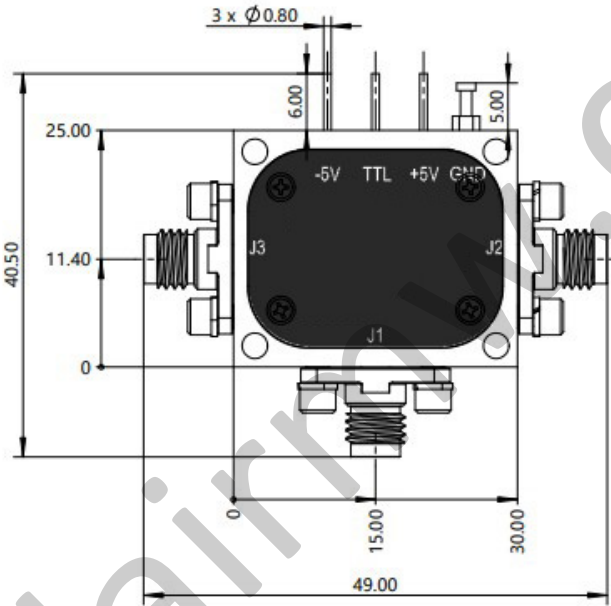


NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

Truth Table

TTL	J1-J2	J2-J3
"0"	ON	OFF
"1"	OFF	ON



LES-2012


18 - 26.5GHz PIN吸收式单刀双掷开关 PIN Absorption SPDT Switch

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	18 - 26.5GHz
隔离度Isolation:	65dB(Typ.)
插入损耗Insertion Loss:	4.0 - 5.5dB
驻波VSWR:	1.7:1(Typ.)
开关速度Switching Speed:	100ns
最大输入功率Maximum Input Power:	+23dBm
控制方式 Control Mode:	TTL(详见真值表)
直流偏置电压DC Supply Voltage:	±5V
直流偏置电流DC Supply Current:	20mA(Max)
工作温度Operation Temperature:	-40 ~ +85℃
存储温度Storage Temperature:	-65 ~ +125℃

—机械技术参数Mechanical Specification—

输入连接器Input Interface:	SMA-F
输出连接器Output Interface:	SMA-F
尺寸Size(excluding connectors):	30x25x11mm
重量Weight:	28.3g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1' ±2/5 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LES-2012	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03		18-26.5GHz PIN吸收式单刀双掷开关 PIN Absorption SPDT Switch		SIZE A3	
DRWN		DATE		CAGE NO		DWG NO.	
ENG		CHK		UNIT mm		REV 1	
Q.A.		SCALE 3:2		SHEET 1 OF 1			