
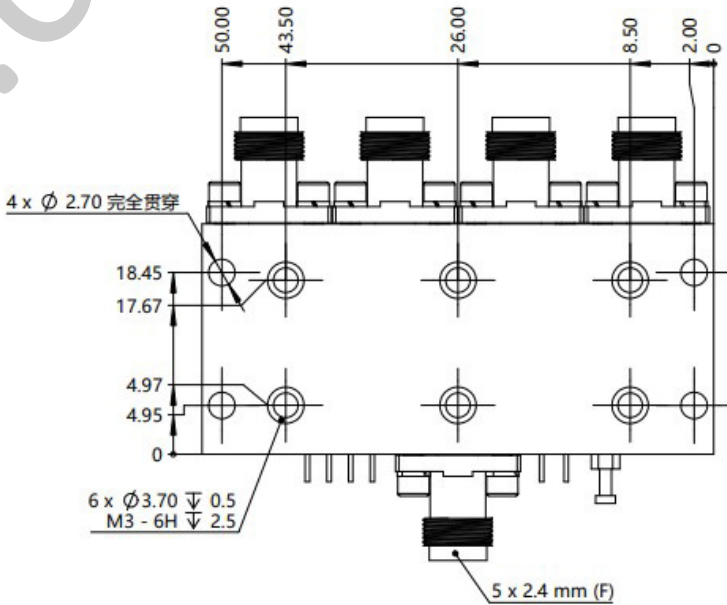
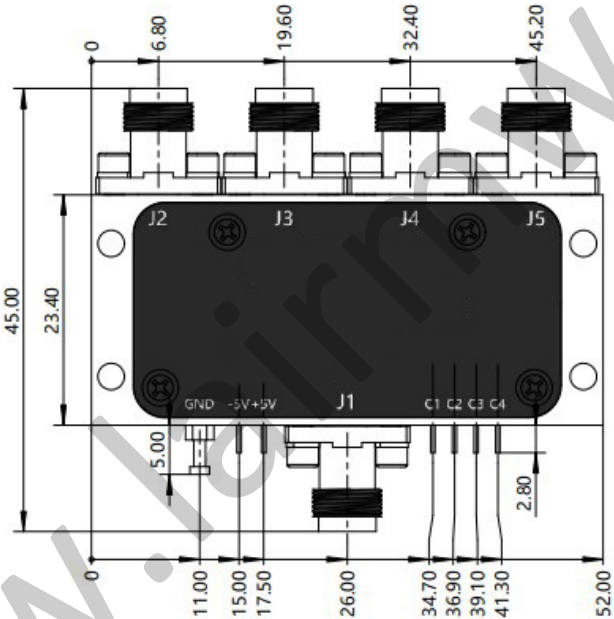
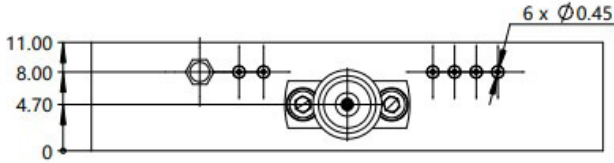


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

Truth Table

TTL				J2	J3	J4	J5
C1	C2	C3	C4				
1	0	0	0	ON	OFF	OFF	OFF
0	1	0	0	OFF	ON	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF
0	0	0	1	OFF	OFF	OFF	ON



LES-2018


6 - 50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	6 - 50GHz
隔离度Isolation:	60dB(Typ.)
插入损耗Insertion Loss:	3.0-10.0dB
驻波VSWR:	1.7:1(Typ.)
开关速度Switching Speed:	100ns
最大输入功率Maximum Input Power:	+23dBm
控制方式 Control Mode:	TTL(详见真值表)
直流偏置电压DC Supply Voltage:	±5V
直流偏置电流DC Supply Current:	60mA
工作温度Operation Temperature:	-40 ~ +85℃
存储温度Storage Temperature:	-65 ~ +125℃

—机械技术参数Mechanical Specification—

输入连接器Input Interface:	2.4mm-F
输出连接器Output Interface:	2.4mm-F
尺寸Size(excluding connectors):	52x23.4x11mm
重量Weight:	45g

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 1° ±2/5 .XX±0.03 .XXX±0.012					 www.lairmw.com sales@lairmw.com		P/N: LES-2018	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80 TOLERANCES +0.05/- .02 +0.10/- .03 +0.15/- .03 +0.20/- .03 +0.25/- .03 +0.30/- .03			Approvals	DATE	6-50GHz PIN吸收式单刀四掷开关 PIN Absorption SP4T Switch			
			DRWN					
			ENG		SIZE A3	CAGE NO	DWG NO.	REV 1
			CHK					
			Q.A.		SCALE 3:2	UNIT mm	SHEET 1 OF 1	