

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LFC-5046


24 – 32 GHz 混频器 Frequency Mixer

—电气技术参数 Electrical Specifications—

射频范围 RF Range:	24 – 32GHz
本振范围 LO Range:	24 – 32GHz
中频范围 IF Range:	DC – 8GHz
LO-RF 隔离度 LO-RF Isolation:	38dB
LO-IF 隔离度 LO-IF Isolation:	40dB
RF-IF 隔离度 RF-IF Isolation:	30dB
变频损耗 Conversion Loss:	10.5dB
本振功率 LO Power:	13dBm
输入功率三阶截断点 IIP3:	18dBm
工作温度 Operation Temperature:	-40 ~ +85°C
存储温度 Storage Temperature:	-65 ~ +150°C

—机械技术参数 Mechanical Specifications—

RF 连接器 RF Interface:	K-2.92mm-F
LO 连接器 LO Interface:	K-2.92mm-F
IF 连接器 IF Interface:	SMA-F
尺寸 Size(excluding connectors) :	/

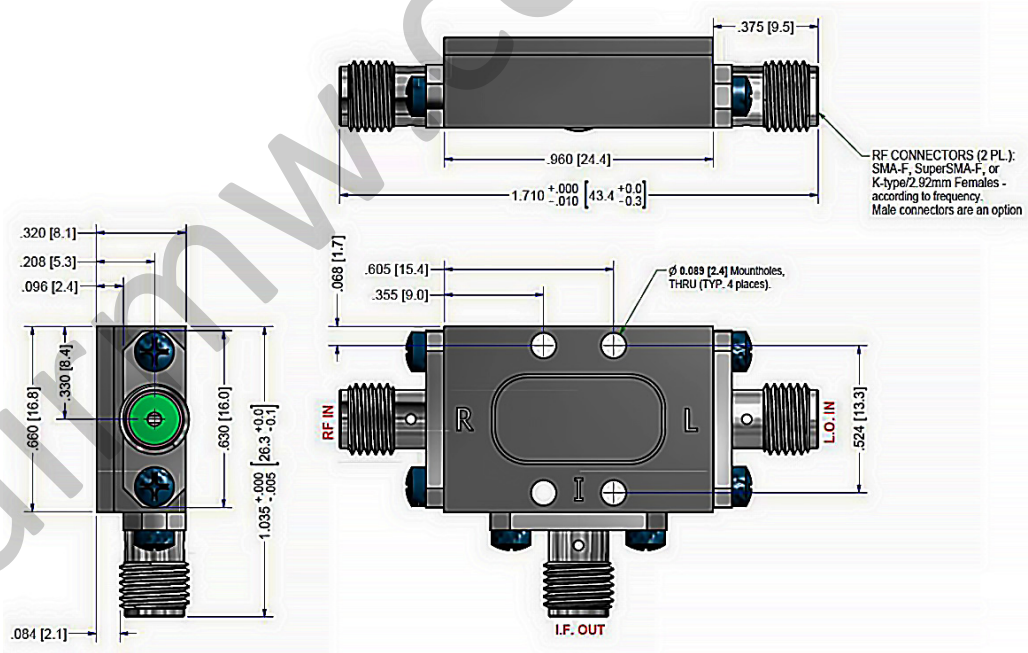

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 ±1° ±2/5 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LFC-5046	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		Approvals		DATE	
DRWN		ENG		CHK		Q.A.	
24 – 32 GHz 混频器 Frequency Mixer 本振功率 LO Power 13 dBm		SIZE A3		CAGE NO		DWG NO.	
SCALE 3:2		UNIT mm		SHEET 1 OF 1		REV 1	