

低温衰减器 Cryogenic Attenuator

特点 Features


- 频率范围 Frequency Range: DC~40GHz
- 衰减值 Attenuation: 0dB
- 工作温区 Operation Temperature: 4K/10mK~5K



规格 Electrical Specification


频率范围 Frequency Range	DC~40GHz
衰减值 Attenuation	0dB
驻波 VSWR	1.35
工作温区 Operation Temperature	4K/10mK~5K Optional
存储温度 Storage Temperature	-55~+85°C
射频端口 RF Port	2.92(SMP/SSMP)
腔体 Cavity	不锈钢钝化(铜镀金)Gold Plated Copper

性能 Typical Performance

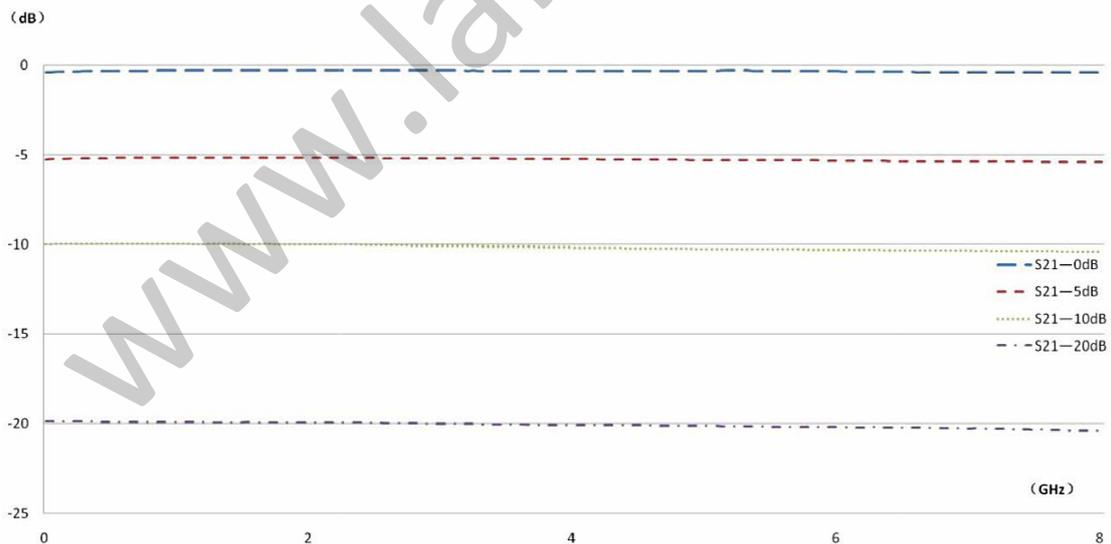

衰减值测试曲线 Attenuation Test Curve

低温衰减器 Cryogenic Attenuator

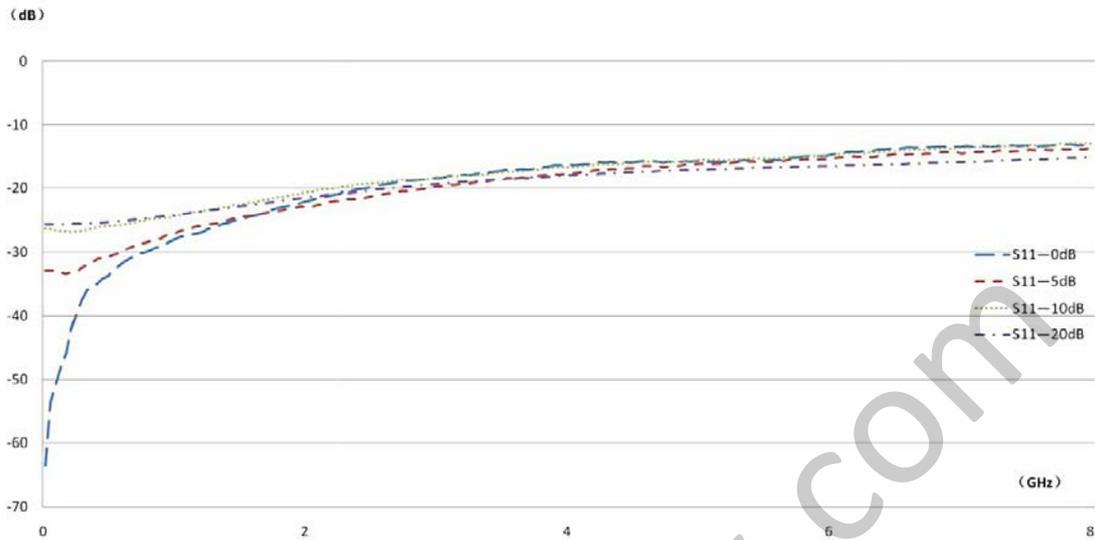

回波损耗测试曲线 Return Loss Test Curve

外形尺寸 Dimension(单位 Unit: mm)

