

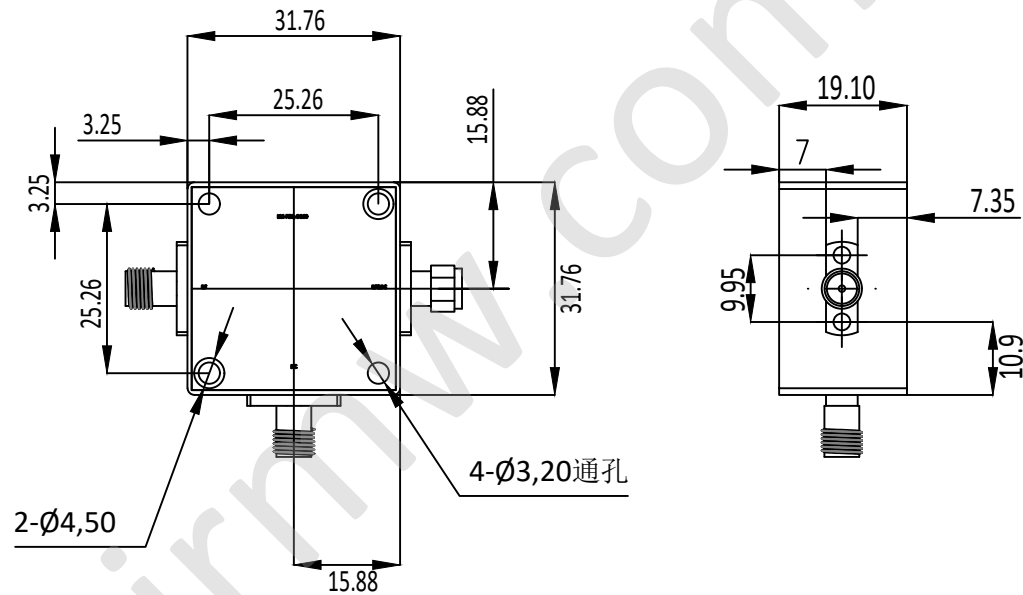


NOTES:UNLESS OTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			



LM-PZQ-0142

0.1 - 4.2GHz 偏置器Bias Tee

—电气技术参数Electrical Specifications—

频率范围Frequency Range:	0.1 - 4.2GHz
插入损耗Insertion Loss:	1.3dB
直流端隔离度DC Terminal Isolation:	25dB
驻波VSWR:	1.30
最大直流电流Maximum DC Current:	500mA
直流电压DC Voltage:	30V

—机械技术参数Mechanical Specification—

RF连接器RF Interface:	SMA-F
RF&DC连接器RF&DC Interface:	SMA-M
尺寸Size(excluding connectors):	/
重量Weight:	/

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 萊爾微波 <i>Laird Microwave</i> www.lairmw.com sales@lairmw.com		P/N: LM-PZQ-0142	
		Approvals	DATE	0.1-4.2GHz偏置器Bias Tee			
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		DRWN			
				ENG			
				CHK			
				Q.A.			
				SIZE A3	CAGE NO	DWG NO.	REV 1
				SCALE 3:2	UNIT mm	SHEET 1 OF 1	