

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LPD2B-DC-3


DC – 3.0 GHz 功分/合路器 Power Splitter/Combiner


—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	DC – 3.0 GHz
隔离度 Isolation:	6.0dB (Min.)
插入损耗 Insertion Loss:	6.9dB (Max.)
相位平衡 Phase Balance:	±3°
幅度平衡 Amplitude Balance:	±0.3dB
输入驻波比 Input VSWR:	1.25 (Max.)
输出驻波比 Output VSWR:	1.25 (Max.)
承受功率 Rating Power:	2W
阻抗 Impedance:	50Ω
工作温度 Operation Temperature:	-35 ~ +75°C

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	BNC-F
输出连接器 Output Interface:	BNC-F
尺寸 Size (excluding connectors):	32x38x20 mm
重量 Weight:	/

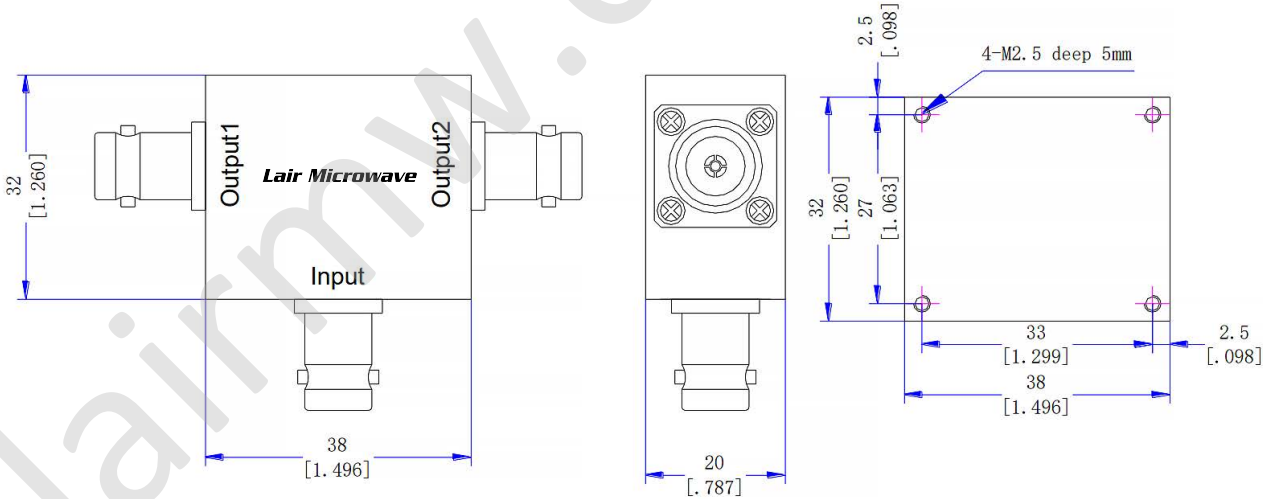

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LPD2B-DC-3	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		DC- 3.0 GHz 功分/合路器Power Splitter/Combiner			
DRWN: QY		DATE		SIZE A3		CAGE NO.	
ENG: CYL				SCALE 3:2		DWG NO.	
CHK: WY				UNIT mm		REV 1	
				SHEET 1 OF 1			