

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LPD2S-18-50


18 – 50GHz 功分/合路器 Power Splitter/Combiner

—电气技术参数Electrical Specifications—

频率范围 Frequency Range:	18 – 50GHz
隔离度 Isolation:	18dB (Min.)
插入损耗 Insertion Loss:	1.8dB (Max.)
相位平衡 Phase Balance:	±6° (Max.)
幅度平衡 Amplitude Balance:	±0.6dB (Max.)
驻波比 VSWR:	1.7 (Max.)
功率 Power Handling:	20Wcw
阻抗 Impedance:	50Ω
工作温度 Operation Temperature:	-40 ~ +85℃

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	2.4mm-F
输出连接器 Output Interface:	2.4mm-F
尺寸 Size (excluding connectors):	/
重量 Weight:	/

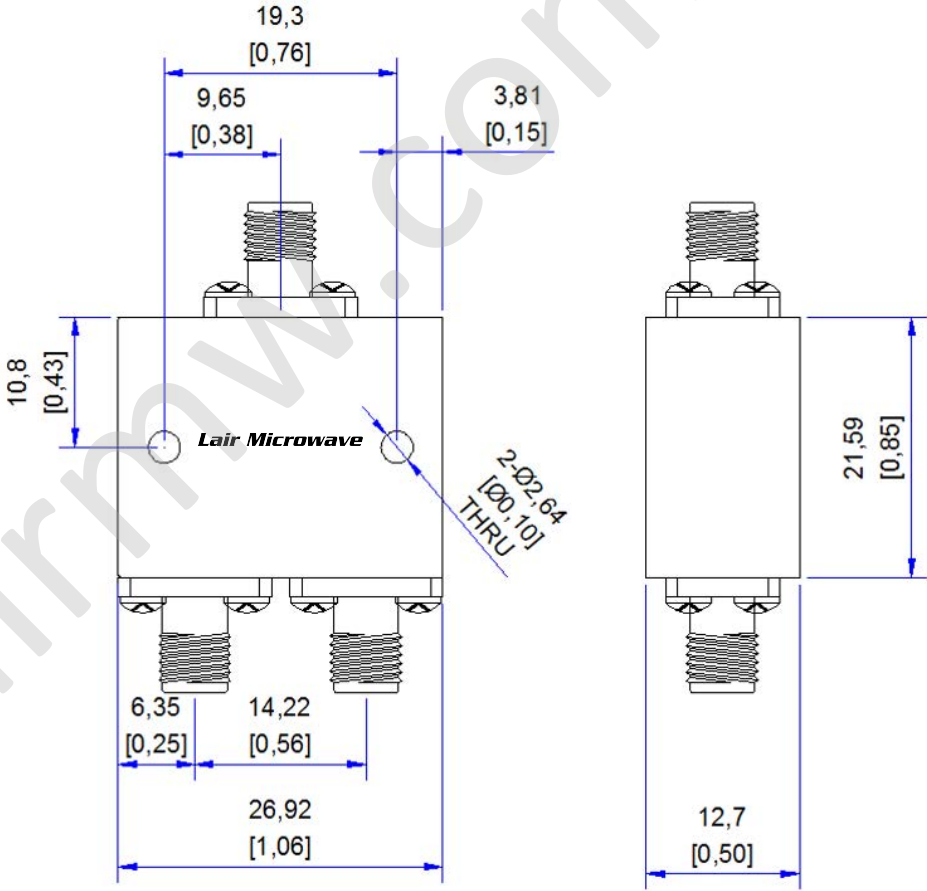

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.1 ±1° ±2/5 .XXX±0.03 .XXX±0.012		 Approvals DATE		 www.lairmw.com sales@lairmw.com P/N: LPD2S-18-50	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80	TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03	DRWN: QY		18 – 50GHz 功分/合路器Power Splitter/Combiner	
		ENG: CYL			
		CHK: WY		SIZE A3	CAGE NO.
				SCALE 3:2	UNIT mm
					DWG NO.
					REV 1
					SHEET 1 OF 1