


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LRJ-1023

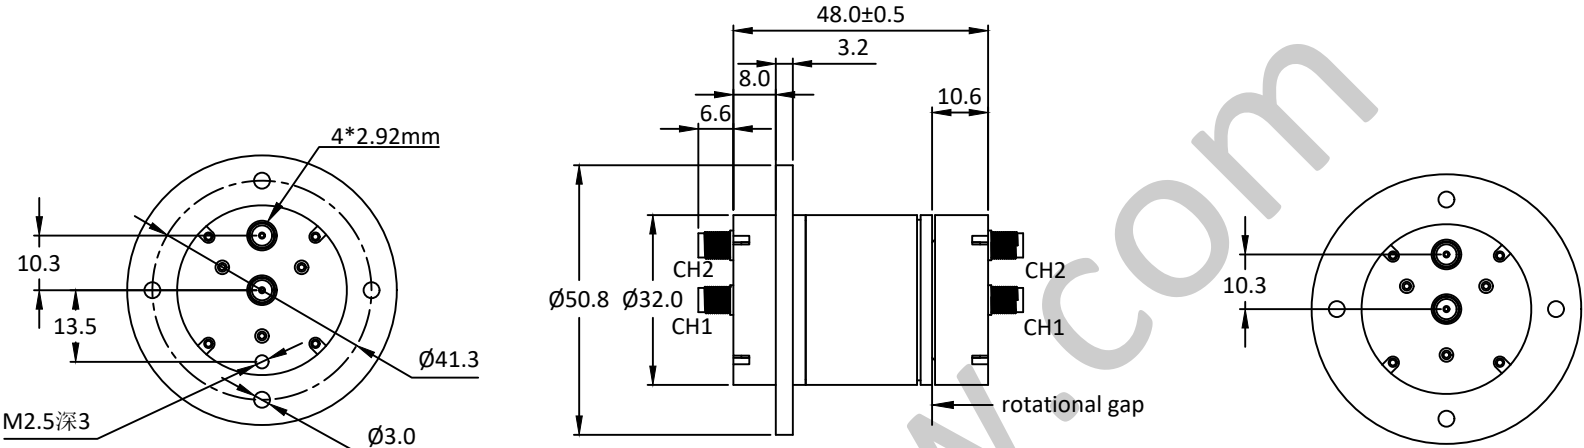


双通道旋转关节Dual Channel Rotary Joint


—电气技术参数Electrical Specifications—

通道Channel:	CH1	CH2
工作频率 Frequency Range:	DC - 18GHz	DC - 18GHz
插入损耗Insertion Loss:	0.4dB@DC-8GHz 1.0dB@8-18GHz	0.75dB@DC-4GHz 1.5dB@4-8GHz 2.5dB@8-12GHz 3.0dB@12-18GHz
插入损耗最大波动值:	0.05dB	0.1dB@DC-4GHz 0.3dB@4-8GHz 0.75dB@8-12GHz 1.5dB@12-18GHz
电压驻波比VSWR:	1.35@DC-8GHz 1.75@8-18GHz	2@DC-4GHz 3@4-8GHz 3.5@8-12GHz 4.5@12-18GHz
驻波比最大波动值:	0.05	0.1@DC-4GHz 0.35@4-8GHz 0.8@8-12GHz 2.0@12-18GHz
耐功率Power:	50W(CW)@1GHz 2kW(Peak)	50W(CW)@1GHz 2kW(Peak)
工作温度Operation Temperature:	-40~+70℃	
存储温度Storage Temperature:	-55~+85℃	
转动速度Speed:	50rpm(Max)	
寿命Life:	21*10 ⁶ 转(Min)	

—机械技术参数Mechanical Specification—

接口Connectors:	2.92mm-F@CH1&2
样式Type:	I
重量Weight:	284g

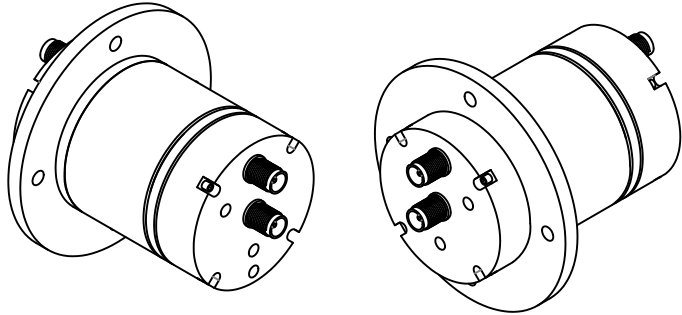

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1023	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/-0.02 +.10/-0.03 +.15/-0.03 +.20/-0.03 +.25/-0.03 +.30/-0.03		DUAL CHANNEL COAX ROTARY JOINT 双通道同轴旋转关节		SIZE A3	
DRWN		DATE		CAGE NO		DWG NO.	
ENG		CHK		UNIT mm		REV 1	
Q.A.		SCALE 3:2		SHEET 1 OF 1			