


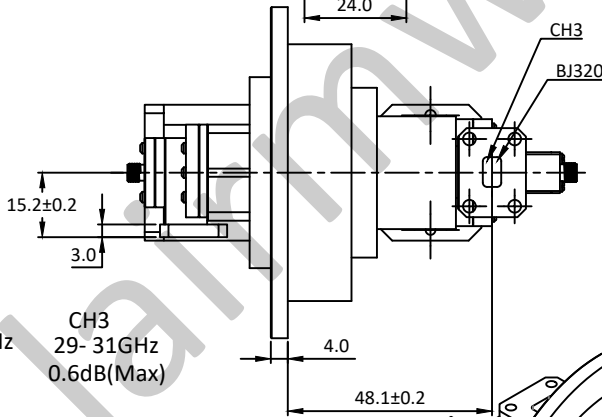
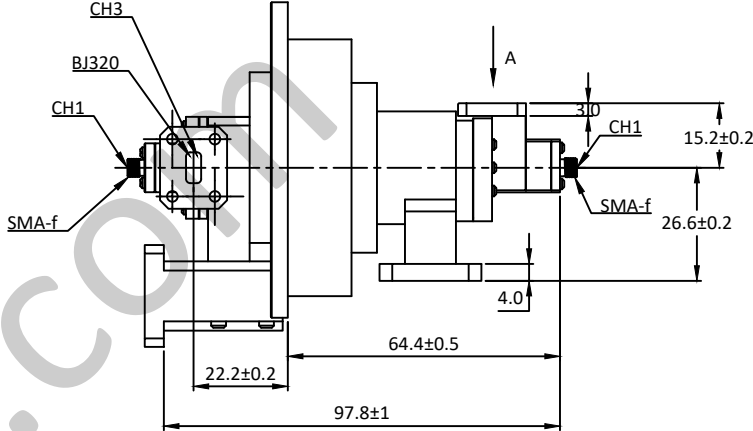
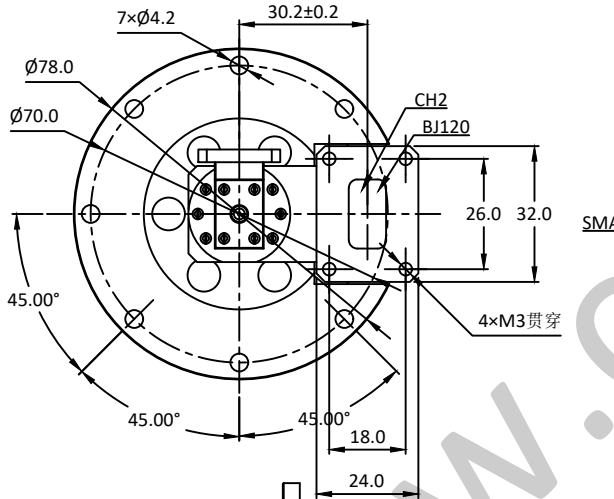


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

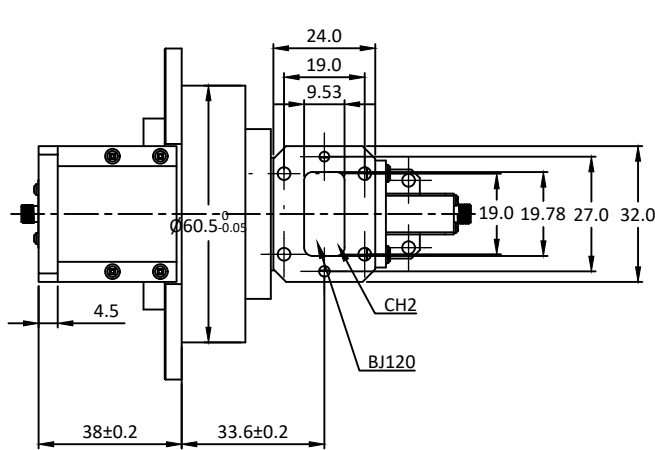

视图A



LRJ-1103

两路波导一路同轴旋转关节Rotary Joint
—电气技术参数Electrical Specifications—

通道Channel:	CH1	CH2	CH3
工作频率 Frequency Range:	DC - 13GHz	13.75 - 14.5GHz	29- 31GHz
插入损耗Insertion Loss:	0.5dB@DC-2GHz(Max) 1.5dB@2-13GHz(Max)	0.4dB(Max)	0.6dB(Max)
插入损耗最大波动值:	0.1dB	0.1dB	0.1dB
电压驻波比VSWR:	1.5@DC-2GHz(Max) 2.0@2-13GHz(Max)	1.3(Max)	1.4(Max)
驻波比最大波动值:	0.1	0.1	0.1
耐功率Power:	1W(CW)	150W(CW)	150W(CW)
工作温度Operation Temperature:	-40~+70℃		
存储温度Storage Temperature:	-55~+85℃		
转动速度Speed:	60rpm(Max)		
寿命Life:	5*10 ⁶ 转(Min)		

—机械技术参数Mechanical Specification—

接口Connectors:	SMA-F	R120	BJ320
样式Type:	/		
重量Weight:	500g		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1103							
		Approvals		DATE		3 CHANNEL WAVEGUIDE ROTARY JOINT 波导同轴—三通道旋转关节							
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/-02 +.10/-03 +.15/-03 +.20/-03 +.25/-03 +.30/-03		DRWN									
				ENG									
				CHK									
				Q.A.				SIZE A3		CAGE NO		DWG NO.	
						SCALE 3:2		UNIT mm		SHEET 1 OF 1			