
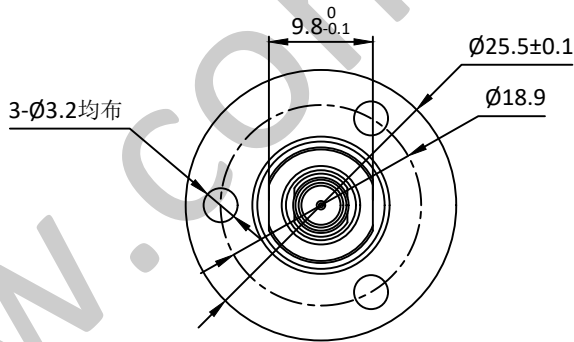


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

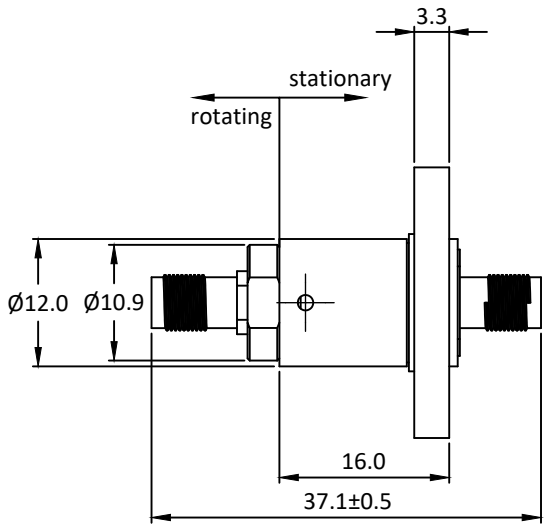


LRJ-1012

DC - 50GHz 旋转关节Rotary Joint
—电气技术参数Electrical Specifications—

工作频率 Frequency Range:	DC - 50GHz
插入损耗Insertion Loss:	0.3dB@DC-10GHz/0.5dB@10-26.5GHz/0.9dB@26.5-50GHz
插入损耗最大波动值:	0.1dB@DC-26.5GHz/0.15dB@26.5-50GHz
电压驻波比VSWR:	1.3@DC-10GHz/1.4@10-26.5GHz/1.7@26.5-40GHz/1.9@40-50GHz
驻波比最大波动值:	0.05@DC-26.5GHz/0.2@26.5-50GHz
耐功率Power	50W@1GHz/15W@10GHz/5W@26.5GHz/3W@50GHz(CW) 1kW(Peak)
工作温度Operation Temperature:	-40~+71℃
存储温度Storage Temperature:	-55~+85℃
转动速度Speed:	200rpm(Max)
寿命Life:	5*10 ⁶ 转(Min)

—机械技术参数Mechanical Specification—

接口Connectors:	2.4mm-F(50Ω)
样式Type:	I
重量Weight:	28g

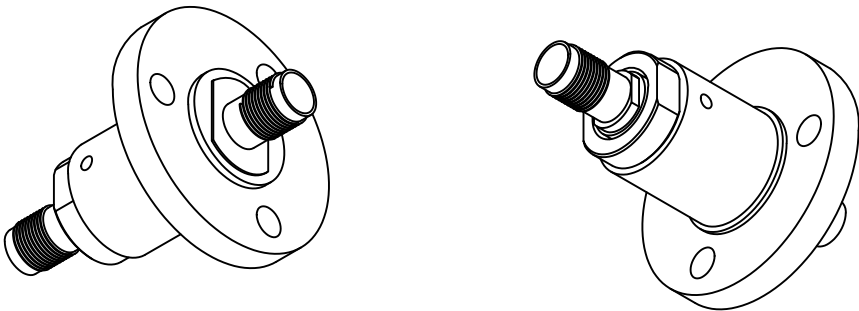

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 萊爾微波 Laird Microwave		P/N: LRJ-1012			
		www.lairmw.com sales@lairmw.com							
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		Approvals		DATE			
				SINGLE CHANNEL COAX ROTARY JOINT 单通道同轴旋转关节					
				SIZE		CAGE NO		DWG NO.	
				A3				REV	
								1	
		Q.A.		SCALE		UNIT			
				3:2		mm			
						SHEET 1 OF 1			