
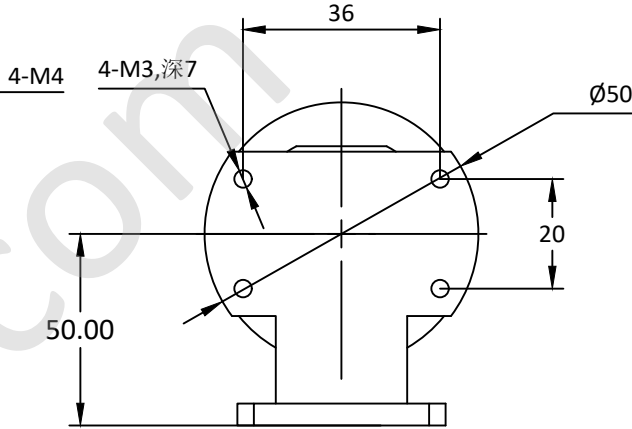
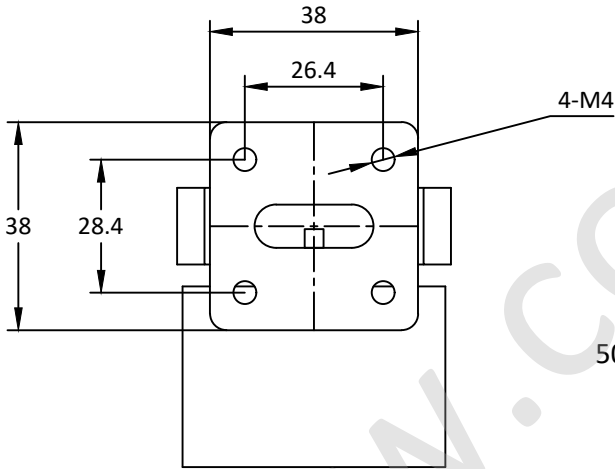


NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

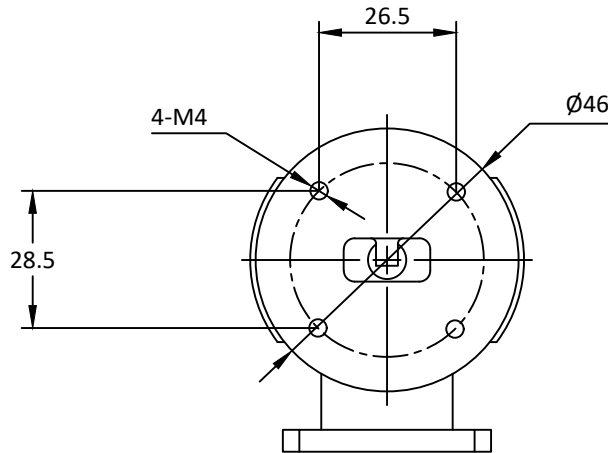



LRJ-1001


13.75 - 14.5GHz 旋转关节Rotary Joint
—电气技术参数Electrical Specifications—

工作频率 Frequency Range:	13.75 - 14.5GHz
插入损耗Insertion Loss:	0.2dB(Max)
插入损耗最大波动值:	0.05dB
电压驻波比VSWR:	1.2(Max)
驻波比最大波动值:	0.1
耐功率Power	200W(CW) 5KW(Peak)
工作温度Operation Temperature:	-40~+70℃
存储温度Storage Temperature:	-55~+85℃
转动速度Speed:	120rpm(Max)
寿命Life:	10*10 ⁶ 转(Min)

—机械技术参数Mechanical Specification—

接口Connectors:	R120
样式Type:	L
重量Weight:	300g

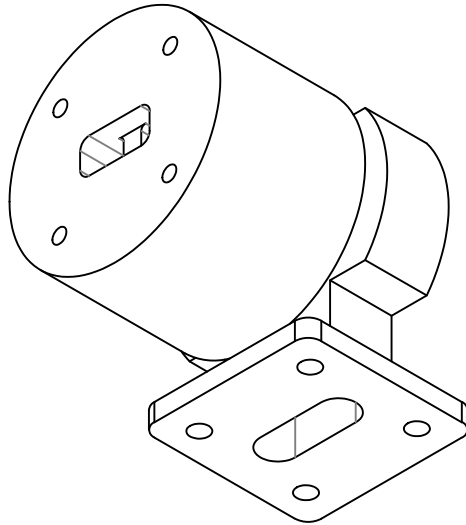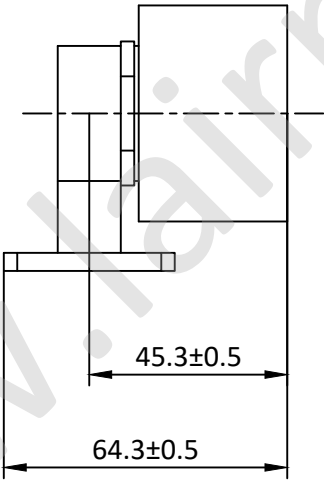

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LRJ-1001	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +0.05/-0.02 +0.10/-0.03 +0.15/-0.03 +0.20/-0.03 +0.25/-0.03 +0.30/-0.03		SINGLE CHANNEL WAVEGUIDE ROTARY JOINT 单通道波导旋转关节		SIZE A3	
DRWN		DATE		CAGE NO		DWG NO.	
ENG		CHK		UNIT mm		REV 1	
Q.A.		SCALE 3:2		SHEET 1 OF 1			