

NOTES:UNLESSOTHERWISE SPECIFIED
THIS IS A CAD GENERATED DRAWING,DO NOT REVISE MANUALLY

REVISION HISTORY					
ZONE	REV	DESCRIPTION	E.C.O.NO	DATE	APPROVED
	1	ENGINEERING RELEASE			

LSN-3004


6 – 18 GHz 2 路功分器 2 Ways Power Divider


—电气技术参数 Electrical Specifications—

频率范围 Frequency Range:	6 – 18 GHz
隔离度 Isolation:	17dB (Min.)
插入损耗 Insertion Loss :	4.5dB (Max.)
相位平衡 Phase Balance:	±5°
幅度平衡 Amplitude Balance:	±0.5dB
输入驻波比 Input VSWR:	1.5:1 (Max.)
输出驻波比 Output VSWR:	1.5:1 (Max.)
阻抗 Impedance:	50Ω
最大输入功率 Maximum Input Power:	+40dBm
工作温度 Operation Temperature:	-40~ +85℃
存储温度 Storage Temperature:	-55~ +125℃

—机械技术参数 Mechanical Specifications—

输入连接器 Input Interface:	SMA-F
输出连接器 Output Interface:	SMA-F
尺寸 Size (excluding connectors):	31x28x8mm
重量 Weight:	25g

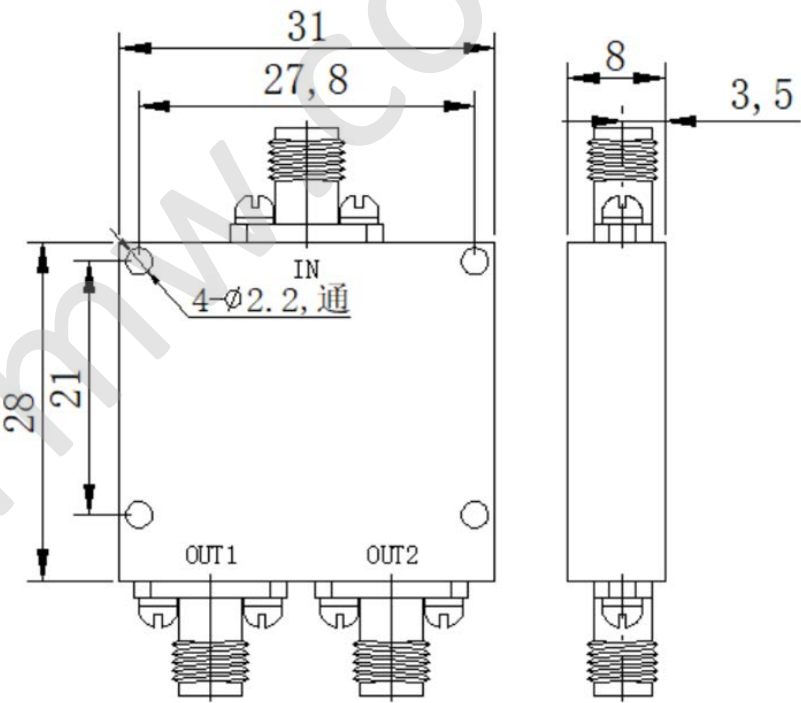

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETER TOLERANCES ARE: DECIMALS ANGLES FRACTIONS .X±0.1 ±1° ±2/5 .XX±0.03 .XXX±0.012				 www.lairmw.com sales@lairmw.com		P/N: LSN-3004	
HOLE DIAMETER .35 TO 3.20 3.21 TO 6.35 6.36 TO 12.70 12.71 TO 19.05 19.06 TO 25.40 25.41 TO 50.80		TOLERANCES +.05/- .02 +.10/- .03 +.15/- .03 +.20/- .03 +.25/- .03 +.30/- .03		Approvals		DATE	
				DRWN			
				ENG			
				CHK			
				Q.A.			
6 – 18 GHz 2 路功分器2 Ways Power Divider							
SIZE		CAGE NO		DWG NO.		REV	
A3						1	
SCALE		UNIT		SHEET 1 OF 1			
3:2		mm					